

- Order
- Inquiry

SL 25

Position
_____ / _____

Required delivery week: _____

1. Number of units
_____ pieces

2. Stacking
 Inside
 Outside

3. Number of panels (inside view)
 _____ left direction
 _____ right direction

4. Glass thickness
 6mm TSG clear
 8mm TSG clear
 Structured glass:

5. Operation of swing panel
 wire cable only (inside)
 add. door knob inside and outside
 add. door knob inside only (standard for outward opening systems)
 lever handle inside and outside - no wire cable

6. Angled layout
 Please provide a detailed plan view with all necessary references to ensure correct sizes.

7. Surface
 RAL _____
 or
 Eloxal _____

Remarks

Client: _____

Tel: _____ Fax: _____

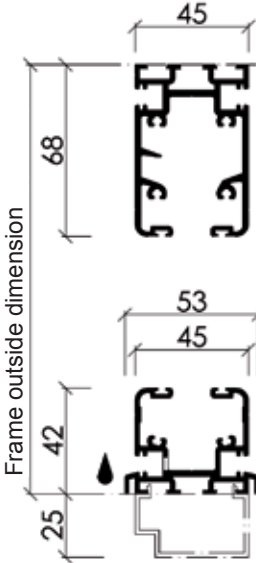

Contact person: _____

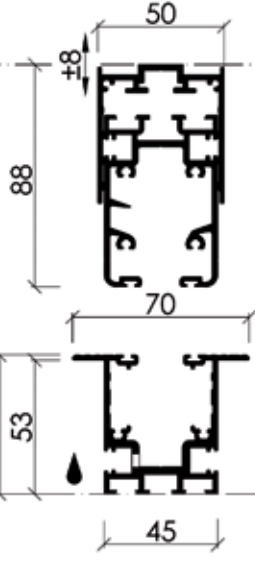

Ref: _____

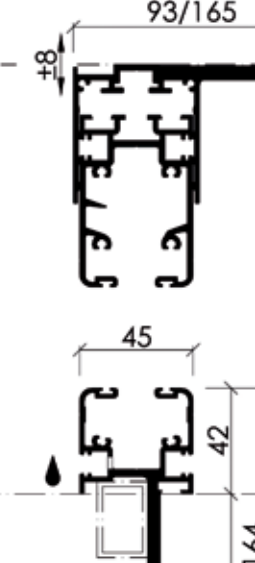

Quotation number: _____

Delivery adress: (if different to client): _____

8. Please choose profile variants

5-25-01-x

 5-25-02-x


5-25-04-x

 5-28-23-x


5-25-14-x (93mm)
 5-25-15-x (165mm)

 5-25-16-x


Frame outside dimension

option

5-25-10-x Joint profile for window cill

Cill depth _____ mm

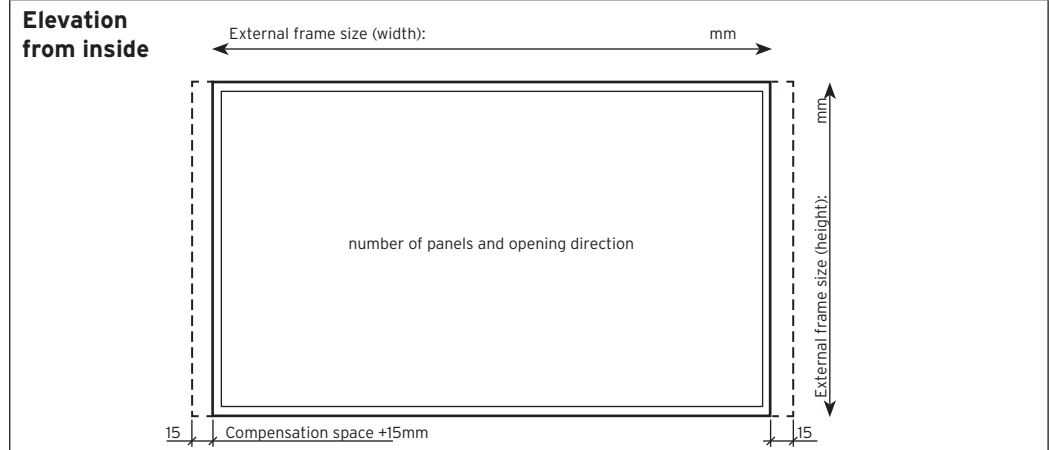
Only available for 8mm glass!

option

Alu tube 30x20x2mm in raw

Cill depth _____ mm

9. Drawing



Outside

Plan view

Inside

panel shown in open position (stacking position)

04/2010 - Subject to technical changes without notice