

○ Order  
○ Inquiry

**SL 35-HSW**

**Position**  
\_\_\_\_\_ / \_\_\_\_\_

**Required delivery week:** \_\_\_\_\_

**1. Number of units**  
\_\_\_\_\_ pieces

**2. Number of panels (view from inside)**  
\_\_\_\_\_ left direction  
\_\_\_\_\_ right direction

**3. Glass**  
○ with: \_\_\_\_\_  
○ prepared for: \_\_\_\_\_ mm

**4. Finish**  
○ profile + corner connector at panel  
**RAL** \_\_\_\_\_  
○ profile  
**Eloxal** \_\_\_\_\_  
+ corner connector  
**RAL** \_\_\_\_\_

Remarks

Client: \_\_\_\_\_ Ref: \_\_\_\_\_


Quotation number: \_\_\_\_\_


Delivery address: (if different to client) \_\_\_\_\_


Tel: \_\_\_\_\_ Fax: \_\_\_\_\_

Contact person \_\_\_\_\_


**6. Hardware choice: Solarlux Design handle stainless steel**

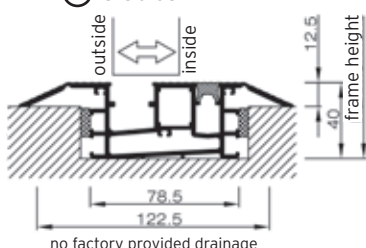
○ Flat handle on inside without lock 


○ Flat handle inside / outside with profile cylinder 


○ Flat handle on inside / outside with cylinder lock 

**7. Floor track choice**

○ 5-50-28-x   
no factory provided drainage

○ 5-50-35-x   
no factory provided drainage

○ 15-50-20-x adjustable floor socket (available on upcharge)   
no factory provided drainage

○ 5-35-02-x SL 35 „Slide“ 

**8. Drawing**

**Elevation from inside**

External frame size (with): \_\_\_\_\_ mm

External frame size (height): \_\_\_\_\_ mm

number of panels and opening direction

Outside

**Plan view**

Inside

panel shown in open position (stacking position)

01/2011- Subject to technical changes without notice