◯ Order
◯ Inquiry

Fax +49 5402 400-8200 SOLARLUX®

SL 35

Position _____ / _____

Required delivery week: _____

1. Number of units

_____ pieces

2. Stacking

☐ Inside
☐ Outside

3. Number of panels (inside view)

_____ left direction

_____ right direction

4. Glass

◯ with: _____
◯ prepared for:
_____ mm

5. Cleaning pin

☐ (installation of cleaning pin only possible with inward opening and top hung systems)

6. Surface
profile + panel connector

RAL

_____

or

Eloxal

_____

+ Panel connector

RAL

_____

Client:	Ref:
	Quotation number:
	Delivery address: (if different to client)
Tel: / Fax:	
Contact person	

7. Hardware choice: ATTENTION! For **parapet installations:**
Solarlux Design handle stainless steel Handle height from frame underside _____ mm

◯ Flat handle on inside without lock

◯ Flat handle inside / outside with profile cylinder (only possible with pair panel)

◯ Flat handle on inside / outside with cylinder lock

7. Floor track options (Examples are to be found on solarlux.com)

◯ **5-35-07-x**

Drainage ☐ yes ☐ no

◯ **5-35-02-x** inside opening ◯ **5-35-11-x** outside opening

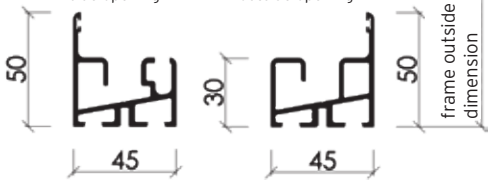

Drainage ☐ yes ☐ no

◯ **5-50-23-x**



No factory installed drainage

◯ **5-45-43-x**

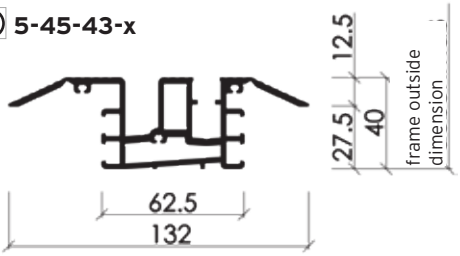

No factory installed drainage

9.Drawing

Elevation from inside

External frame size (witdh): _____ mm

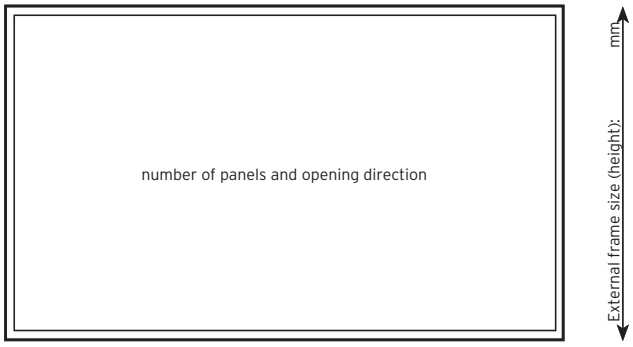

Outside

Plan view _____

Inside

panel shown in open position (stacking position)

01/2011- Subject to technical changes without notice